
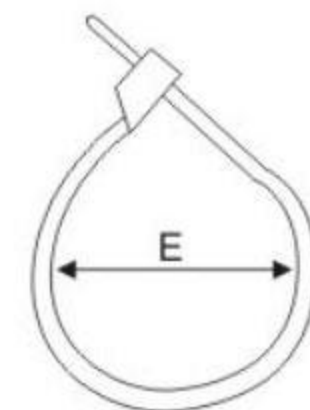


材质：采用UL认可之尼龙66材料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。

操作温度：-35℃~85℃

颜色：标准颜色为本色（白色），另有抗紫外线之黑色，特殊颜色欢迎订做。

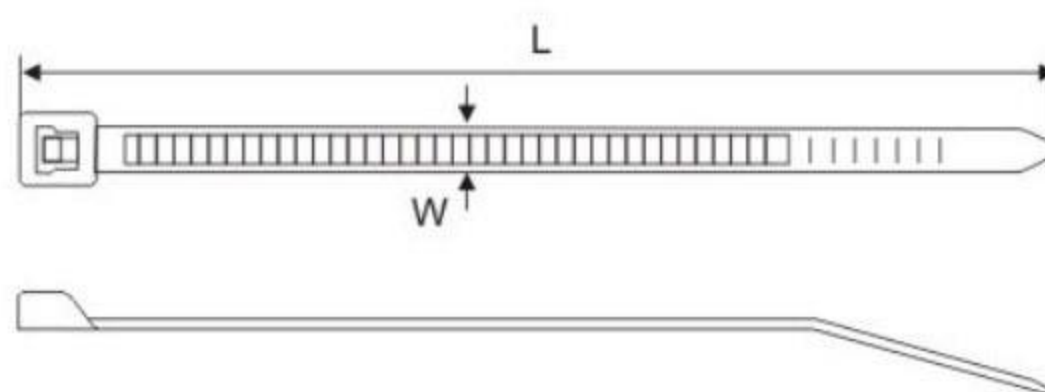

捆扎直径
Max.Bundle Dia.

Material:Nylon 66,94V-2 certificated by UL-Heat-resisting, Acid & erosioncontrol, Insulate well and not apt to age.

Operating temperature:-35℃~85℃.

Color:Natural(or white,standard color),Uvblack and other colors are availabe as requested.

型号 ITEM. No.	L(长)		W(E)	捆扎范围 Bundle Diameter E(mm)	拉力 Min.loop Tesile Strength	
	INCH	MM			LBS	KGS
SYO-3*60	2.4"	60	1.9	2-11	14	6.5
SYO-3*80	3.2"	80		2-18		
SYO-3*100	4.0"	100		2-22		
SYO-3*120	4.7"	120		2-30		
SYO-3*150	6.0"	150		2-35		
SYO-3*200	8.0"	200		2-50		
SYO-3*80	3.2"	80	2.0	2-18	14	6.5
SYO-3*100	4.0"	100		2-22		
SYO-3*120	4.7"	120		2-30		
SYO-3*120	4.7"	120	2.2	2-30	18	8
SYO-3*150	6.0"	150		2-35		
SYO-3*180	7.1"	180		2-42		
SYO-3*200	8.0"	200		3-50		

型号 ITEM. No.	L(长)		W(E)	捆扎范围 Bundle Diameter E(mm)	拉力 Min.loop Tesile Strength			
	INCH	MM			LBS	KGS		
SYO-3*80	3.2"	80	2.5	2-16	18	8		
SYO-3*100	4.0"	100		2-22				
SYO-3*120	4.7"	120		2-30				
SYO-3*150	6.0"	150		2-35				
SYO-3*200	8.0"	200		3-50				
SYO-4*150	6.0"	150	2.6	2-35	18	8		
SYO-4*200	8.0"	200		3-50				
SYO-4*180	7.1"	180	2.8	3-42	27	12		
SYO-4*200	8.0"	200		3-50				
SYO-4*250	10"	250		3-65				
SYO-4*300	12"	300		3-80				
SYO-4*150	6.0"	150	3.0	3-35	33	15		
SYO-4*250	10"	250		3-65				
SYO-4*120	4.7"	120	3.2	3-30	40	18		
SYO-4*180	7.1"	180		3-42				
SYO-4*200	8.0"	200		3-50				
SYO-4*250	10"	250		3-65				
SYO-4*300	12"	300		3-80				
SYO-4*140	5.5"	140	3.6	3-33	40	18		
SYO-4*150	6.0"	150		3-35				
SYO-5*200	8.0"	200		3-50				
SYO-5*250	10"	250	3.5	3-65			40	18
SYO-5*250	10"	250	3.6	3-65				
SYO-5*300	12"	300		3-80				
SYO-5*300	12"	300		3-80				
SYO-5*350	14"	350		3-90				
SYO-5*370	14.6"	370		3-98				
SYO-5*400	16"	400		3-105				
SYO-5*450	17.7"	450	3-130					
SYO-5*500	19.7"	500	3-150	4.0	40	18		
SYO-5*200	8.0"	200	3-50					
SYO-5*250	10"	250	3-65					
SYO-5*300	12"	300	3-80	4.6	50	22		
SYO-5*200	8.0"	200	3-50					
SYO-5*250	10"	250	3-65					
SYO-5*300	12"	300	3-80					
SYO-5*350	14"	350	3-90					
SYO-5*380	15"	380	3-102					
SYO-5*400	16"	400	3-105					
SYO-5*450	17.7"	450	3-130					
SYO-5*500	19.7"	500	3-150					

型号 ITEM. No.	L(长)		W(E)	捆扎范围 Bundle Diameter E(mm)	拉力 Min.loop Tesile Strength	
	INCH	MM			LBS	KGS
SYO-5*200	8.0"	200	4.8	3-50	50	22
SYO-5*250	10"	250		3-65		
SYO-5*300	12"	300		3-80		
SYO-5*350	14"	350		3-90		
SYO-5*370	14.6"	370		3-98		
SYO-5*400	16"	400		3-105		
SYO-5*450	17.7"	450		3-130		
SYO-5*500	19.7"	500		3-150		
SYO-8*200	8.0"	200	5.2	3-50	65	30
SYO-8*250	10"	250		3-65		
SYO-8*300	12"	300		3-80		
SYO-8*350	14"	350		3-90		
SYO-8*400	16"	400		3-105		
SYO-8*450	17.7"	450	5.5	3-130	65	30
SYO-8*500	19.7"	500		3-150		
SYO-8*200	8.0"	200	5.8	3-50	65	30
SYO-8*250	10"	250		3-65		
SYO-8*300	12"	300		3-80		
SYO-8*350	14"	350		3-90		
SYO-8*400	16"	400		3-105		
SYO-8*200	8.0"	200	6.0	3-50	65	30
SYO-8*250	10"	250		3-65		
SYO-8*200	8.0"	200	7.2	3-50	120	55
SYO-8*250	10"	250		4-65		
SYO-8*300	12"	300		4-80		
SYO-8*350	14"	350		4-90		
SYO-8*400	16"	400		4-105		
SYO-8*450	17.7"	450		4-110		
SYO-8*500	20"	500		4-150		
SYO-8*650	25.6"	650		4-190		
SYO-8*300	12"	300	7.6	4-80	120	55
SYO-8*350	14"	350		4-90		
SYO-8*400	16"	400		4-105		
SYO-8*450	17.7"	450		4-110		
SYO-8*500	20"	500		4-150		
SYO-10*500	20"	500	8.8	8-150	175	79.4
SYO-10*600	23.6"	600		8-170		
SYO-10*650	25.6"	650		8-190		
SYO-10*700	27.6"	700		10-205		
SYO-10*800	31.5"	800		10-230		
SYO-10*900	35.5"	900		10-265		
SYO-10*1000	40"	1000		10-300		